


2,5"er Buchsen



● IS
(mit Innenschmierung)


● Messing
(ohne Schmierung)

● Spannbuchse

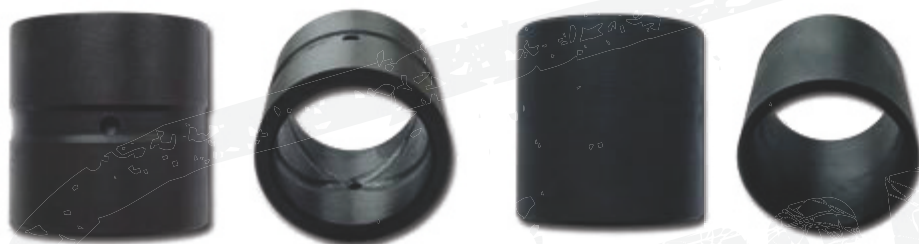

● AIS
(mit Außen- und Innenschmierung)

● OS
(ohne Schmierung)



d Innen Ø	D Außen Ø	L Länge/Höhe	Typ	Material	Lagernummer
● 2,5" (63,5 mm)	2,7/8" (73,08 mm)	84,14 mm	OS	Messing	932 064 073 084
● 2,5" (63,5 mm)	3" (76,2 mm)	1,5" (38,1 mm)	Spannbuchse	Federstahl	945 064 076 038
● 2,5" (63,5 mm)	3" (76,2 mm)	59,53 mm	OS	ST52-3**	972 064 076 060
● 2,5" (63,5 mm)	● 3" (76,2 mm)	3" (76,2 mm)	AIS	ST52-3**	992 064 076 076
● 2,5" (63,5 mm)	● 3,1/16" (79,38 mm)	3" (76,2 mm)	IS	ST52-3**	982 064 079 076
● 2,5" (63,5 mm)	● 3,1/16" (79,38 mm)	4" (101,6 mm)	Reparaturbuchse IS	ST52-3**	982 064 079 102

** Tenifer-QPQ-Härteverfahren mehr zu diesem Thema auf Seite 97

● Innen Kreuzdrill Außen Ringnut

● Innen Spiralnut

● Innen Kreuzdrill

2,5"er Abstreifer



Metallkäfig außen



d Innen Ø	D Außen Ø	H Höhe	Lagernummer
2,5" (63,5 mm)	3" (76,2 mm)	5/16" (8,1 mm)	907 064 076 008
2,5" (63,5 mm)	3" (76,2 mm)	1/4" (5,21 mm)	907 064 076 005