



2"er Buchsen

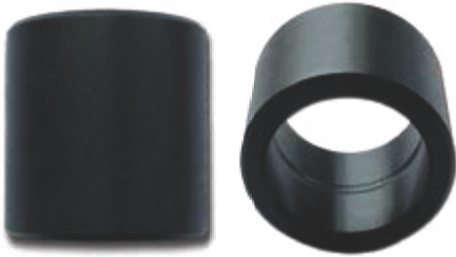

● IS
(mit Innenschmierung)

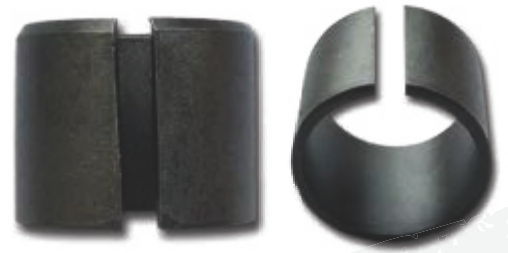


● Spannbuchse



● AIS
(mit Außen- und Innenschmierung)



● OS
(ohne Schmierung)

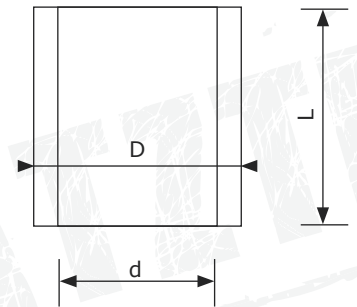

| d Innen Ø | D Außen Ø | L Länge/Höhe | Typ | Material | Lagernummer |
|----------------|---------------------|-----------------|--------------------|------------|-----------------|
| ● 2" (50,8 mm) | 2,5" (63,5 mm) | 33 mm | AIS | ST52-3** | 992 051 064 033 |
| ● 2" (50,8 mm) | 2,5" (63,5 mm) | 34,8 mm | AIS | ST52-3** | 992 051 064 035 |
| ● 2" (50,8 mm) | 2,5" (63,5 mm) | 50 mm | OS | ST52-3** | 972 051 064 050 |
| ● 2" (50,8 mm) | 2,5" (63,5 mm) | 2" (50,8 mm) | Spannbuchse | Federstahl | 945 051 064 051 |
| ● 2" (50,8 mm) | 2,5" (63,5 mm) | 64 mm | IS | ST52-3** | 982 051 064 064 |
| ● 2" (50,8 mm) | ● 2,5" (63,5 mm) | 3" (76,2 mm) | AIS | ST52-3** | 992 051 064 076 |
| ● 2" (50,8 mm) | ● 2,7/16 (66,68 mm) | 3" (76,2 mm) | IS | ST52-3** | 982 051 067 076 |
| ● 2" (50,8 mm) | ● 2,7/16 (66,68 mm) | 4" (101,6 mm) | Reparaturbuchse IS | ST52-3** | 982 051 067 102 |

** Tenifer-QPQ-Härteverfahren mehr zu diesem Thema auf Seite 97

- Innen Kreuzdrill Außen Ringnut
- Innen Spiralnut
- Innen Kreuzdrill

2"er Abstreifer



Metallkäfig außen



| d Innen Ø | D Außen Ø | H Höhe | Lagernummer |
|--------------|----------------|----------------|-----------------|
| 2" (50,8 mm) | 2,5" (63,5 mm) | 1/4" (6,35 mm) | 907 051 064 006 |