



2"er Buchsen

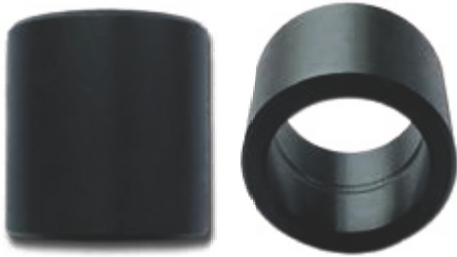

● IS
(mit Innenschmierung)

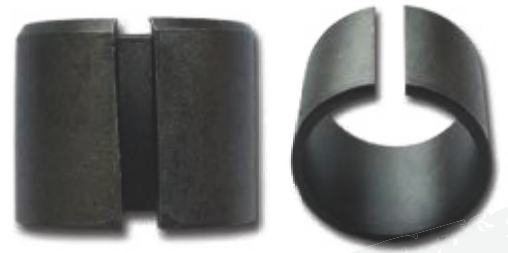


● Spannbuchse



● AIS
(mit Außen- und Innenschmierung)



● OS
(ohne Schmierung)

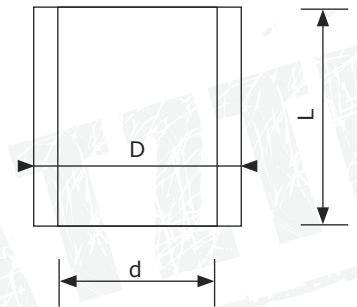

d Innen Ø	D Außen Ø	L Länge/Höhe	Typ	Material	Lagernummer
● 2" (50,8 mm)	2,5" (63,5 mm)	33 mm	AIS	ST52-3**	992 051 064 033
● 2" (50,8 mm)	2,5" (63,5 mm)	34,8 mm	AIS	ST52-3**	992 051 064 035
● 2" (50,8 mm)	2,5" (63,5 mm)	50 mm	OS	ST52-3**	972 051 064 050
● 2" (50,8 mm)	2,5" (63,5 mm)	2" (50,8 mm)	Spannbuchse	Federstahl	945 051 064 051
● 2" (50,8 mm)	2,5" (63,5 mm)	64 mm	IS	ST52-3**	982 051 064 064
● 2" (50,8 mm)	● 2,5" (63,5 mm)	3" (76,2 mm)	AIS	ST52-3**	992 051 064 076
● 2" (50,8 mm)	● 2,7/16 (66,68 mm)	3" (76,2 mm)	IS	ST52-3**	982 051 067 076
● 2" (50,8 mm)	● 2,7/16 (66,68 mm)	4" (101,6 mm)	Reparaturbuchse IS	ST52-3**	982 051 067 102

** Tenifer-QPQ-Härteverfahren mehr zu diesem Thema auf Seite 97

- Innen Kreuzdrill Außen Ringnut
- Innen Spiralnut
- Innen Kreuzdrill

2"er Abstreifer



Metallkäfig außen



d Innen Ø	D Außen Ø	H Höhe	Lagernummer
2" (50,8 mm)	2,5" (63,5 mm)	1/4" (6,35 mm)	907 051 064 006