


## 4"er Buchsen

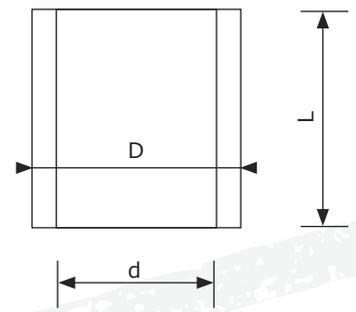

● IS  
(mit Innenschmierung)

● AIS  
(mit Außen- und Innenschmierung)

d Innen Ø	D Außen Ø	L Lange/Höhe	Typ	Material	Lagernummer
● 4" (101,6 mm)	● 4,5" (114,3 mm)	4" (101,6 mm)	AIS	ST52-3**	992 102 114 102
● 4" (101,6 mm)	● 4,7/16" (117,48 mm)	4" (101,6 mm)	Reparaturbuchse IS	ST52-3**	982 102 117 102
● 4" (101,6 mm)	● 5" (127 mm)	5" (127 mm)	AIS	ST52-3**	992 102 127 127
● 4" (101,6 mm)	● 5,1/16" (130,18 mm)	5" (127 mm)	Reparaturbuchse IS	ST52-3**	982 102 130 127

Laschen nicht gehärtet! Material ST52-3

\* 72h langzeit gasnitriert, gehärtet und geschliffen

\*\* Tenifer-QPQ-Härteverfahren mehr zu diesem Thema auf Seite 97

● Innen Kreuzdrall Außen Ringnut

● Innen Spiralnut

## 4"er Abstreifer



● Metallkäfig außen



● Metallkäfig außen



d Innen Ø	D Außen Ø	H Höhe	Lagernummer
● 4" (101,6 mm)	4,5/8" (117,48 mm)	3/16" (5 mm)	907 102 118 005
● 4" (101,6 mm)	4,5/8" (117,48 mm)	5/16" (8 mm)	907 102 118 008
● 4" (101,6 mm)	4,3/4" (120,65 mm)	5/16" (8 mm)	907 102 121 008